





Model : 388-S
: 388-SS

BALL VALVE (3-PC)

Stainless steel

End Type BSPT , Butt weld
Material CF8M (Din 1.4408), Stainless steel
Pressure 1000PSI (PN63)
Temp -60F to 450F (-23C to 230C)
Seat RPTFE (15% Reinforced Glassfiber PTFE)
Stem SS316 Blow-out Proof

PRESSURE / TEMPERATURE RATING

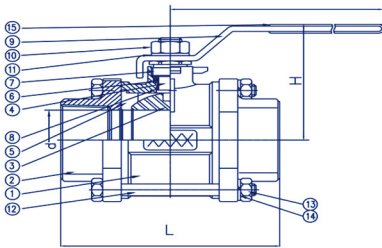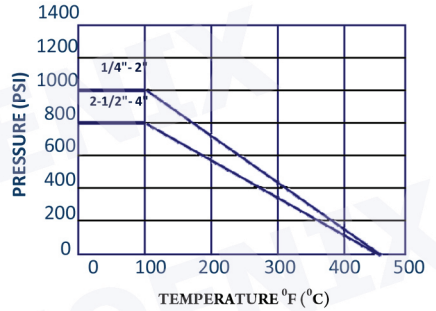

Materials

NO.	Partname	Material	Q/Ty
1	Body	SS304 / SS316	1
2	Cap	SS304 / SS316	2
3	Ball	SS304 / SS316	1
4	Stem	SS304 / SS316	1
5	Ball Seats	PTFE / 15%-R-PTFE	2
6	Stem Packing	PTFE / 15%-R-PTFE	1
7	Gland	SS304	1
8	Thrust Washer	PTFE / 15%-R-PTFE	1
9	Handle	SS304	1
10	Handle Nut	SS304	1
11	Handle Washer	SS304	1
12	Bolts	SS304	4-6
13	Bolts Nuts	SS304	4-6
14	Bolts Washer	SS304	4-6
15	Handle Sleeve	PVC	4-6

Dimension mm

Size	d	L	H	E	Wt(kg)
1/4	11.6	60.5	52.0	100.0	0.35
3/8	12.7	60.5	52.0	100.0	0.43
1/2	15.0	65.5	58.0	100.0	0.52
3/4	20.0	79.0	58.0	120.0	0.72
1	25.0	86.0	70.0	148.0	1.02
1 1/4	32.0	105.0	75.0	148.0	1.72
1 1/2	38.0	119.0	86.0	164.0	2.42
2	50.0	133.0	98.0	164.0	3.60
2 1/2	65.0	163.0	130.0	248.0	7.52
3	80.0	189.0	137.0	248.0	10.80
4	100.0	228.0	180.0	290.0	19.50