

LIFT CHECK VALVE


Cast Iron (PN16)

Model : LCC-143



Materials

NO.	Partname	Material
1	Body	GG25 Cast Iron
2	Disc	Stainless steel
3	Bonnet	Cast Iron
4	Seal rings	Stainless steel

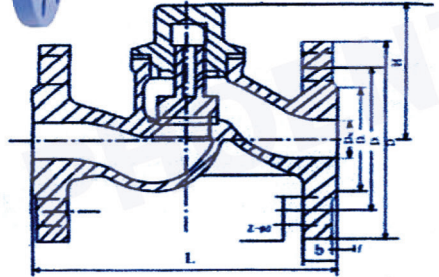

Hydrostatic Shell Test : 25 bars (kgf/cm²) at 120 °C

Hydrostatic Shell Test : 21 bars (kgf/cm²) at 120 °C

Applicable Medium : Water, Steam

Working temperature : 16bar

Flange dimensions : DIN 2533 , Flange to face dimensions : DIN 3202F1

Dimension

mm

Size	INCH	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	8	10
	MM	15	20	25	32	40	50	65	80	100	125	150	200	250
L Face-to-face		130	150	160	180	200	230	290	310	350	400	480	600	730
H Height (OPEN)		176	180	232	238	262	272	323	353	381	453	502	620	702
D Diameter		95	105	115	135	145	160	180	195	215	245	280	335	405
W Hand-wheel Diameter		65	75	85	100	110	125	145	160	180	210	240	295	355